





安装外形图 Overall dimension

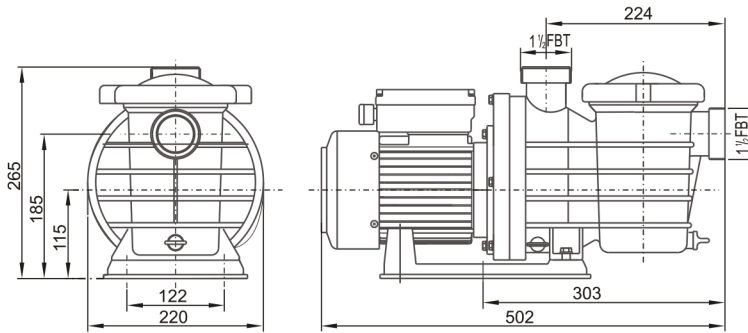

性能曲线 Performance curves

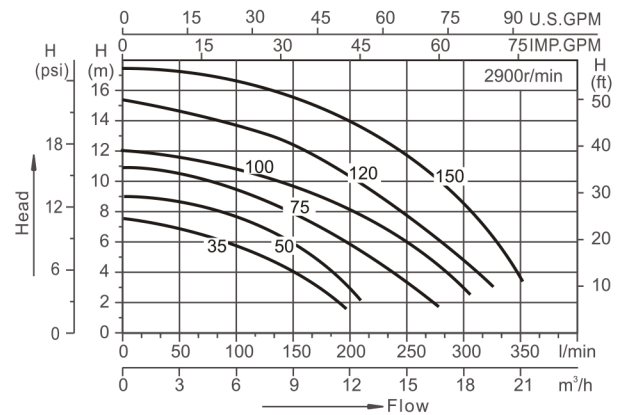

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233: 2008
EN 60335-2-30: 2009
EN 60335-2-35: 2002+A1+A2
EN 60335-2-80: 2003+A1+A2
ERP547/2012

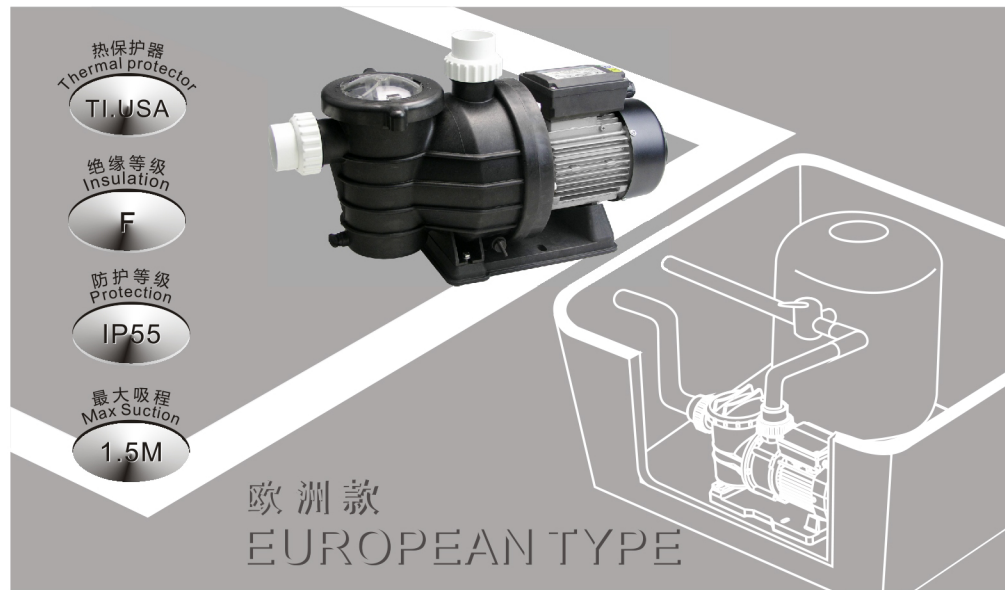

海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P _I)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
SMP35	190	7.5	220-240/50	0.25	0.35	1.6	48.5or50	8.1	535×255×325
SMP50	220	9	220-240/50	0.37	0.5	2.0	48.5or50	9.3	535×255×325
SMP75	280	11	220-240/50	0.55	0.75	3.2	48.5or50	10.6	535×255×325
SMP100	310	12	220-240/50	0.75	1.0	3.8	48.5or50	11.4	535×255×325
SMP120	340	15.5	220-240/50	0.9	1.2	4.6	48.5or50	11.8	535×255×325
SMP150	350	17.5	220-240/50	1.1	1.5	5.8	48.5or50	12.8	535×255×325

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

